


N1 INCLUDES TX POWER IN ALL TRANSMISSION HEADERS FOR METRIC NORMALIZATION AT N2


FIG. 1

2 / 16

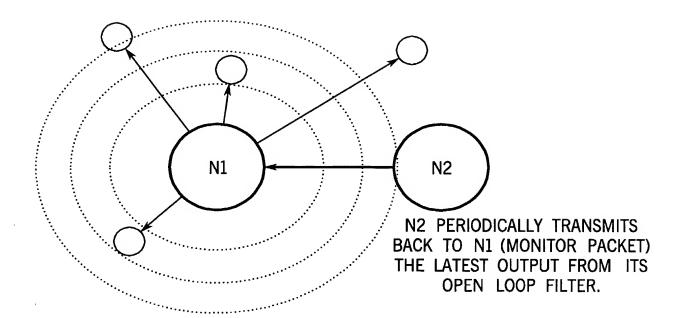

THIS FORMS THE CLOSED LOOP FEEDBACK PATH BACK TO N1

FIG. 2

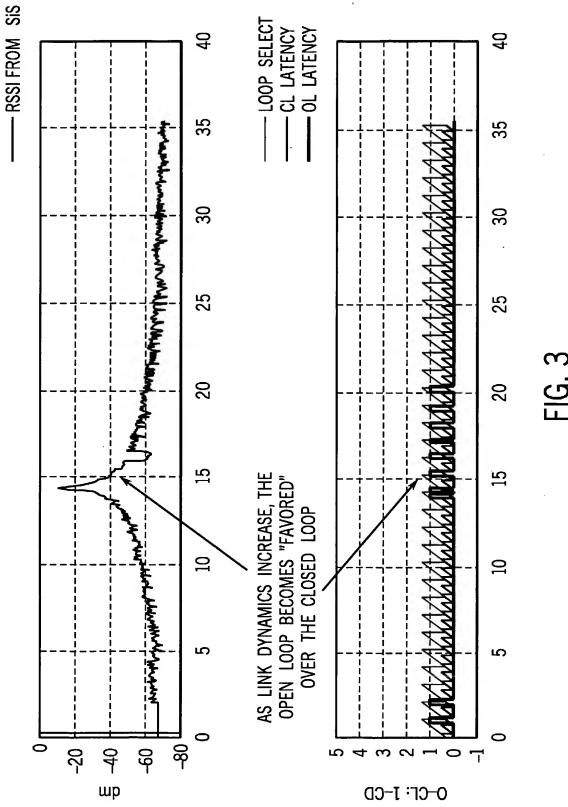

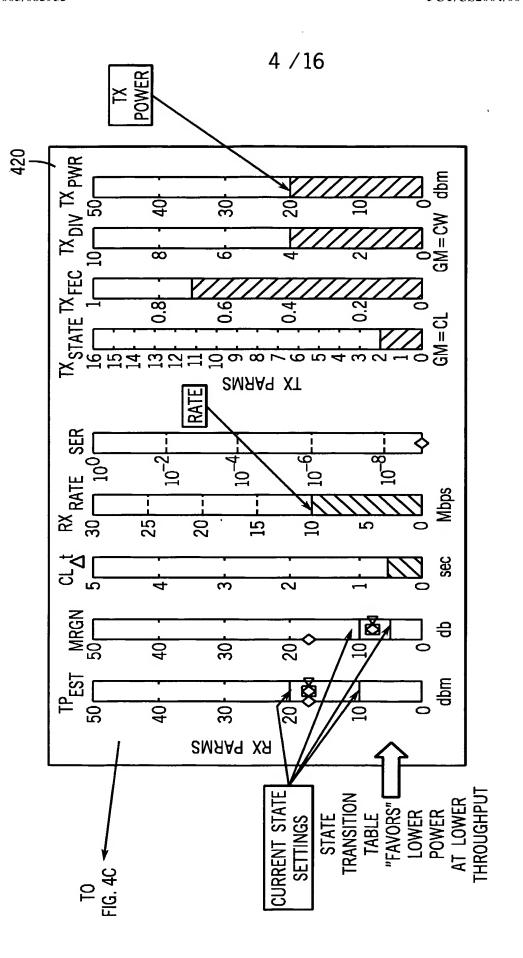


FIG. 4/

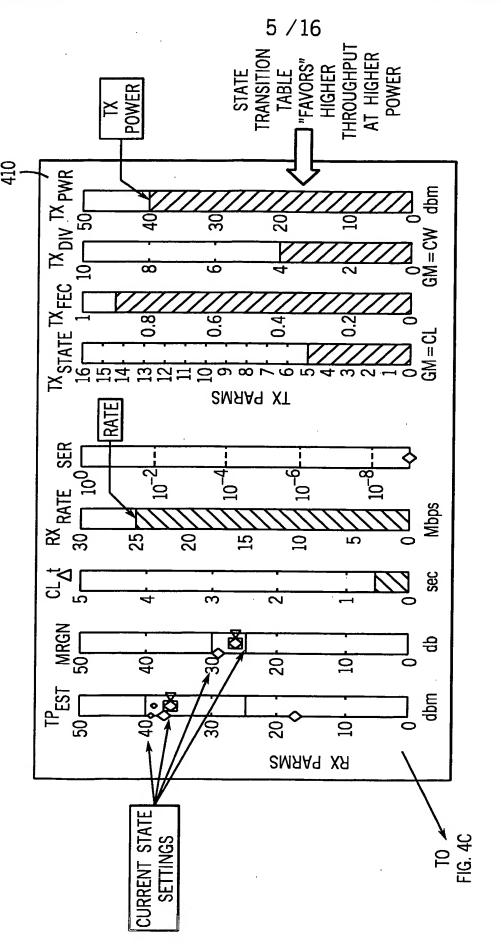
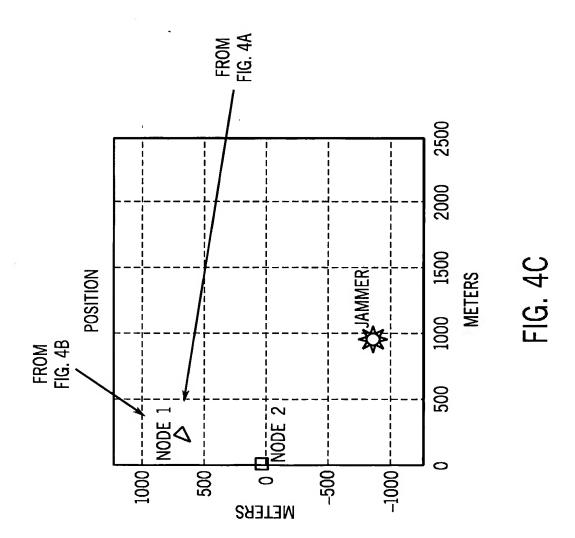


FIG. 4E



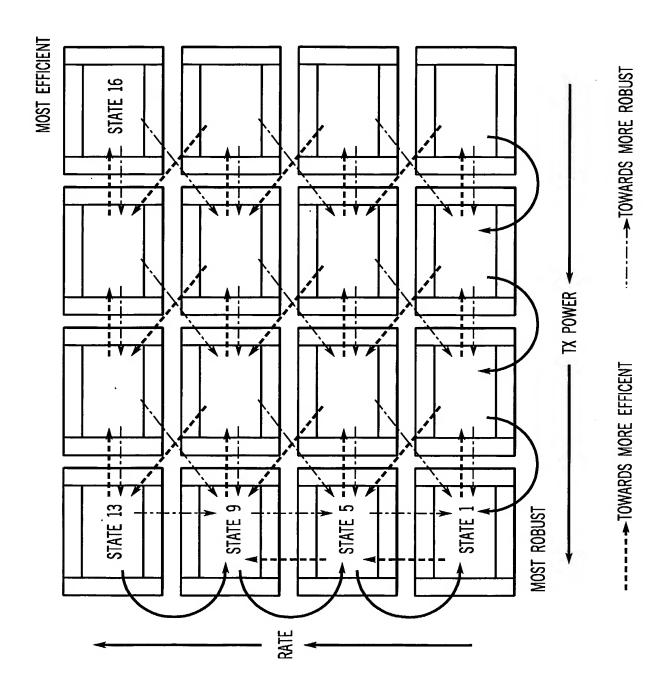


FIG. 5



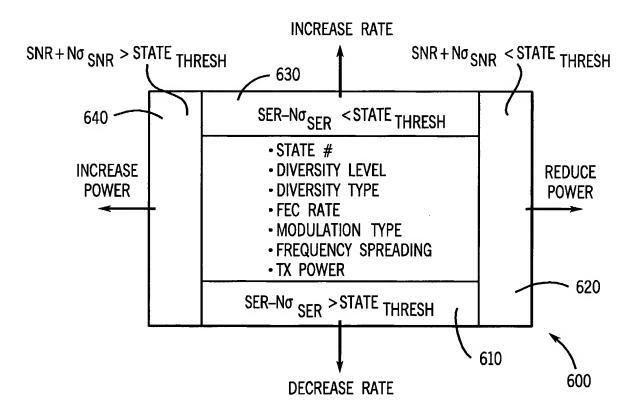



FIG. 6


	_	•
C	_	j
L		_

	/ 10								
								_	•
No.								<b>~</b> ≥	5
Multiple Statesh Crossed									
SICH THOUSE									
Multiply at	exs	1 m	က	Ŋ	വ	9	7	œ	
Threshon Multiple	- Del		<del></del>	-	-	_	$\vdash$	1	
Asolul Asily	EN S	25	25	30	00	100	001	001	
aldistruction of	<sup>₽</sup> %   _		2	က	3	5	6 1	7 1	
besson Thresh Aser Multiple	80 -		_	-		<del>,</del> -1		1	
Asalu (18)	en c	15	20	50	25	25	25	25	
Multiple Misting Thresh Crossed	ج ا ۲۶	. 2	4	4	9	/	∞	8	
Second Thresh Assistant As	~   ~   ~		_		_	_			
Multiple  best thresh crossed  Thresh crossed  Asing the crossed	41 15	25	25	15	25	2	2	ις.	
$\partial_{ij}$			2	3	8	5	9	7 -	
		۱ ,۱		<b>—</b>	<b>—</b>	_	<b>—</b>		
A Div. Combining(0=Max,1=Min,2=Mep)  The Div. Combining(0=Max,1=Min,2=Mep)  Thresh  Wiation Multiple	\d\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\	40	o	40	40	25	20	15	
Male Make (0)8010 (a) Sie of of the contract o	2 2								
(day O)Bujujuju yiQ y	ZA   2	0.5	0.75	0.75	0.91	0.91	0.91	0.91	
Div. Copper	می ا ـــ	. 2	7	2	2	2	2	2	
A Div. Combining(0 = Nep)  Resity Type (1 = CW, 2 = Rep)  Resity Type (1 = CW, 2 = Rep)	W c	2	2	2	2	. 7	2	2	
PASITY Level Modulation (ASO)	<u> </u>	. ?	2	2	2	2	7	2	
10-91-5, ASC 400 AND	<u>1/0</u> 4	4	4	4	4	4	4	4	
Asab-81-5, Asab for Modulation (Asab-81-5, Asab for Modulation (Asab-81-5) Asab for Modulation (Asab for Modulation for Modula	le l	15	15	15	30	30	30	30	
		ı —	-	1	2	7	7	7	
Ment State Number (midb) 19Wod (midb)	4 4	40	40	30	40	30	20	10	
Taga Ja	2 -	2	ന	4	വ	9	7	œ	

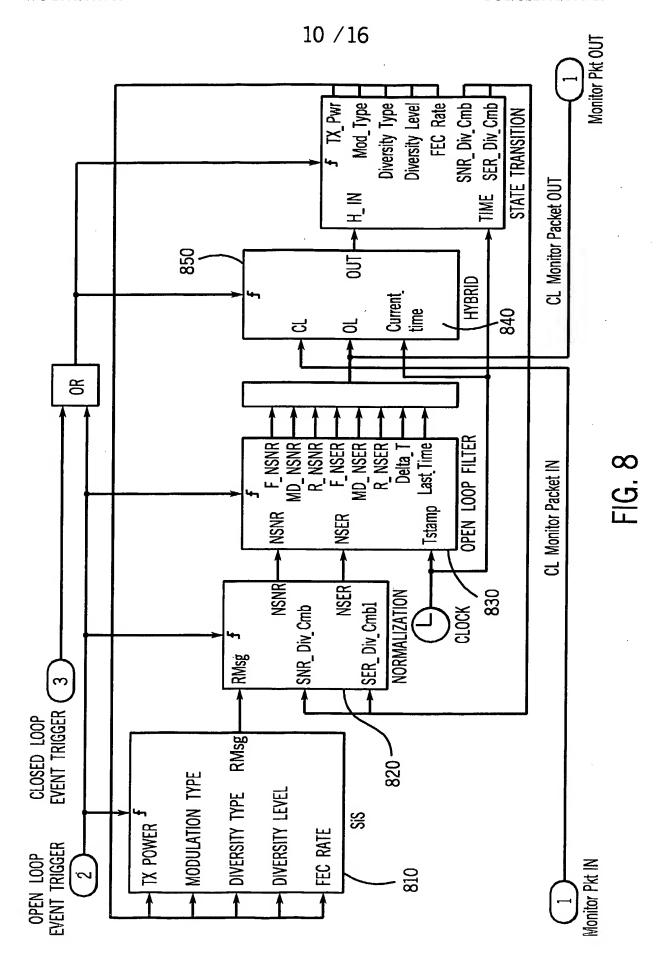

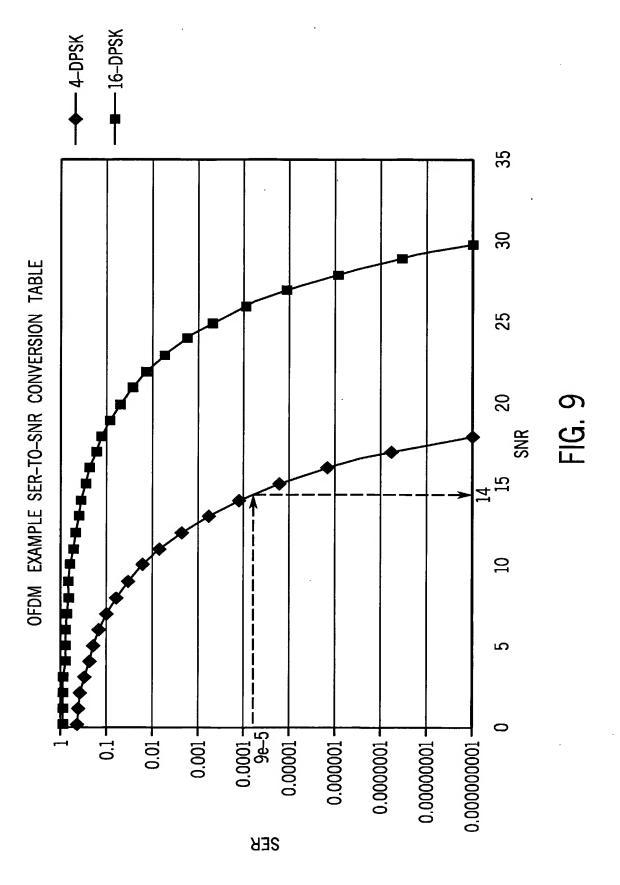

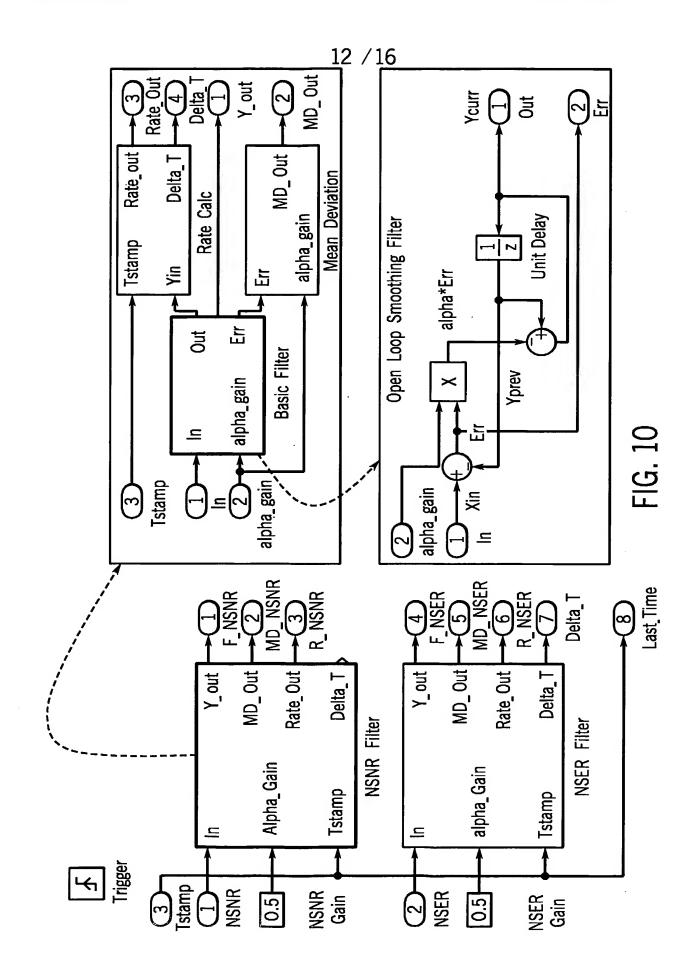

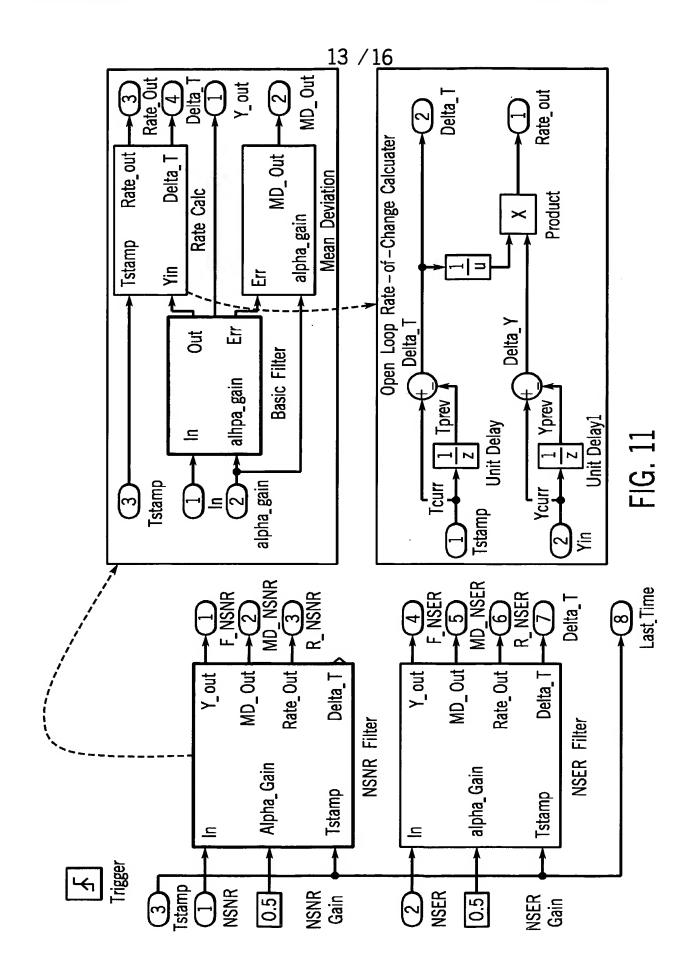

NODE 1'S IS BEING IMPACTED BY JAMMER.

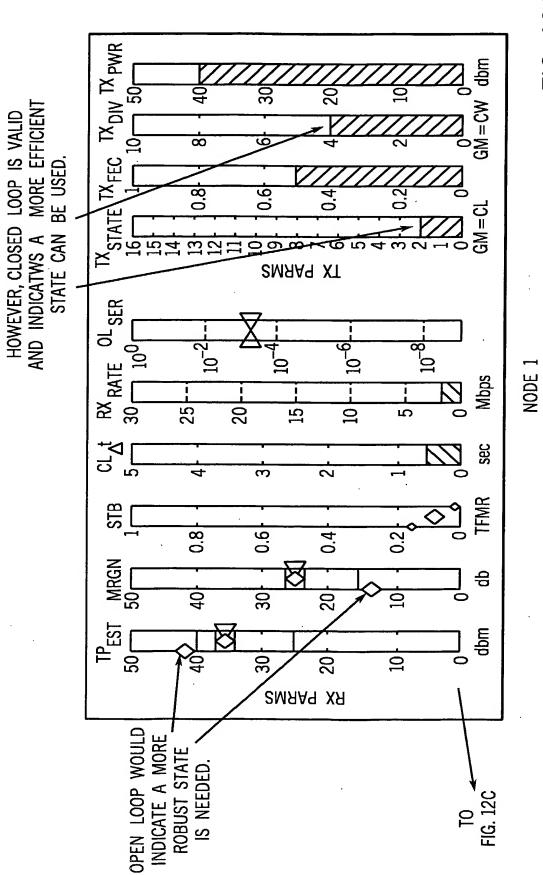


FIG. 12A

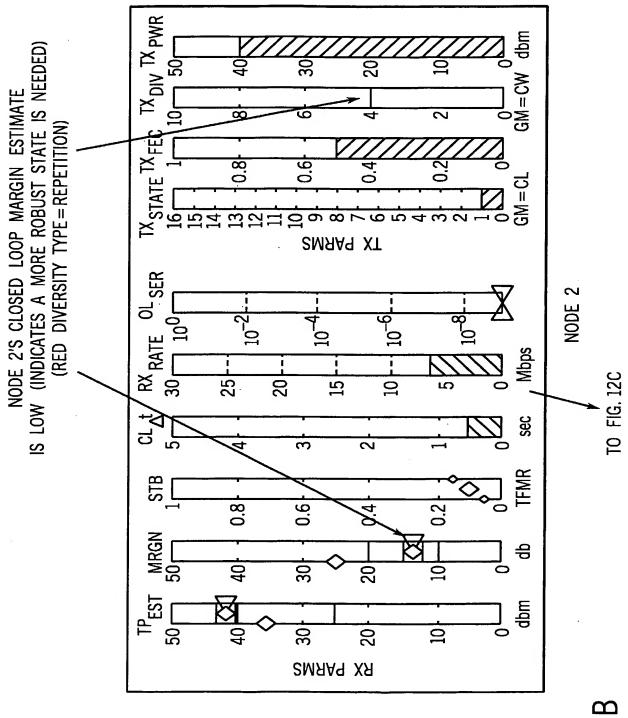


FIG. 12B

